

Triple Band (2.4GHz & 5GHz & 6GHz) Singe Feeding Intenna

Electrical spec.:

•Frequency Band	2400~2483.5 MHz 5150~5850 MHz 5925~7125 MHz
•VSWR	<2.0
•Gain(Max)	2400~2483.5 MHz 2dBi (Typical) 5150~5850 MHz 3dBi (Typical) 5925~7125 MHz 3dBi (Typical)
•Impedance	50Ω (Nominal)
•Polarization	Linear
•Radiation pattern	Omni Direction
•Admitted power	5W (max)


Mechanical spec.:

•Antenna Size	55*10*1mm
•Coaxial cable	Φ1.13/ Other
•Connector	IPEX-1/ Other
•Mounted type	assemble into case slot or adhesive onto case
•Operating Temperature	-30° ~ +70° C
•ROHS	Compliant
•Application	Router/Mobile devices

Anray200830103BA01




Dimensions (Unit: mm)

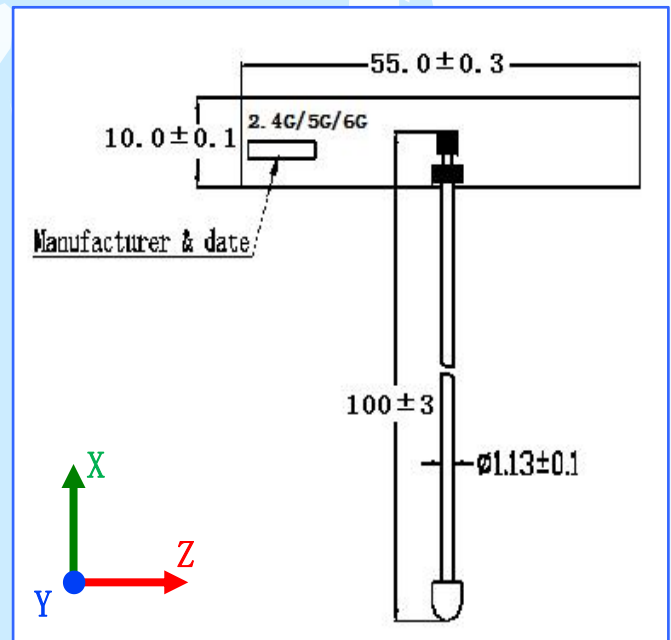


Note:

- 1、Cable length&color can according to customer's requirement.
- 2、The performance of intenna has important relation with the location into the set .
- 3、Either set or intenna 's location change ,the performance of intenna will be different.


Electrical performance Screenshot

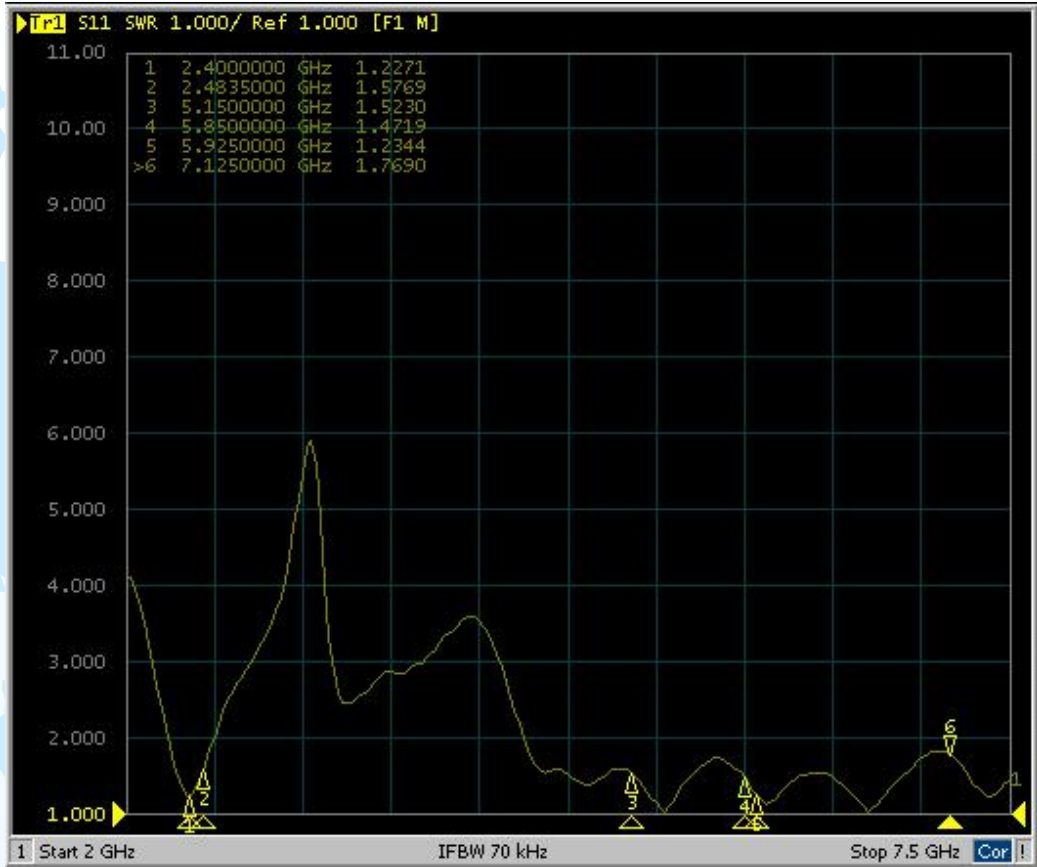


VSWR

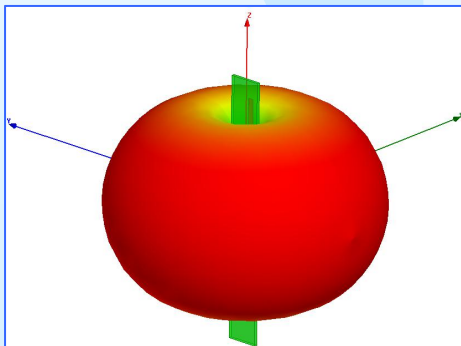

2440MHz

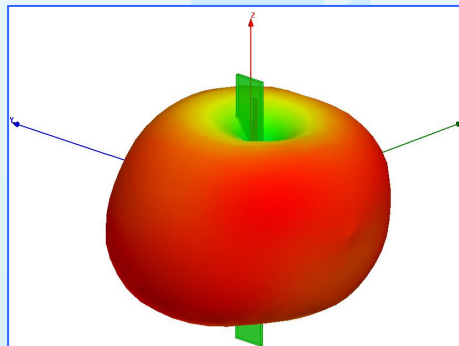

5550MHz

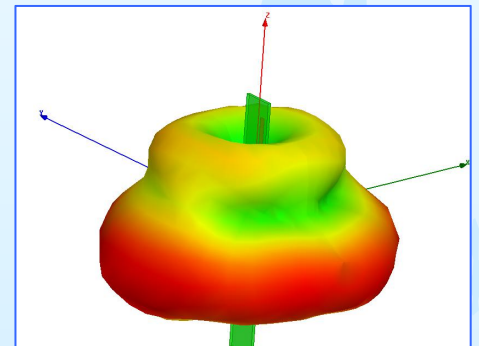

6550MHz